

MC-1

METAL-CERAMIC THERMOCOUPLE PROTECTION TUBE



MC-1 thermocouple protection tubes are a unique blend of metal and ceramic, exhibiting properties not found solely in either individual material. The ceramic is a slip-cast composite of chromium and aluminium oxide. During the chromium-metal phase, it takes on a very tightly bonded layer of chromium oxide, which together with the inert nature of the alumina, provides this material with its remarkable resistance to oxidising atmospheres over 1204°C (2200°F). MC-1 tubes offer high thermal conductivity and excellent sensitivity to temperature changes in high-temperature applications. Preheating to 482°C (900°F) before immersion in molten metal at 1093°C (2000°F) or higher is recommended.

APPLICATIONS:

- Molten copper and brass to 1149°C (2100°F)
- Corrosive SO₂ and SO₃ gas to 1371°C (2500°F) and SO₃ and HF gas to 1093°C (2000°F)
- Molten zinc to 871°C (1600°F)
- Molten lead to 343°C (650°F)
- Atmosphere directly above molten glass in an open hearth glass furnace
- Carbon bake furnaces
- Steel mill soaking pits
- ***Not recommended for use in molten aluminium or glass, carburising or nitriding atmospheres, cryolite, or copper alloys above 1149°C (2100°F)***

ADVANTAGES:

- Excellent oxidation resistance
- Thermal conductivity comparable to that of stainless steel
- Resists wetting by many metals and alloys, and basic furnace slags
- Resistant to oxidising atmospheres over 1204°C (2200°F)
- Good wear resistance/resistance to sliding friction
- Good strength at temperatures up to 1538°C (2800°F)
- Low porosity prohibits gas ingress

Pyrotek's worldwide locations provide fast reliable service. Please contact us for additional information.

Pyrotek

AVAILABILITY:


Tube lengths

22.9, 30.5, 45.7, 61, 76.2, 91.4, 106.7, 121.9 cm

9, 12, 18, 24, 30, 36, 42, 48 in


Note: Special lengths and fittings are available upon request.

Connector fittings

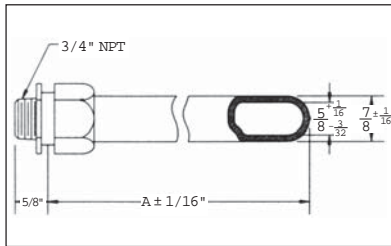


Type A

EMT connector, gland compression, zinc plated steel body with zinc plated malleable iron nut.

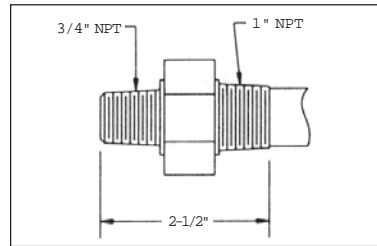

TYPE B

Cold rolled steel fitting with 1-3/8 inch Hex, cemented to the tube. Provides threads for head and furnace mounting.

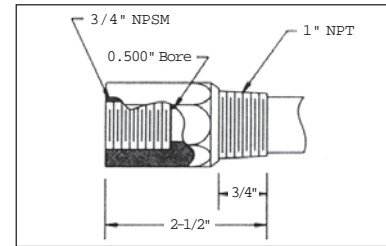

TYPE C

Same as type B except provided with internal thread.

TECHNICAL DATA

Density

5.8 gm/cc

Hardness

34 Rc

Thermal conductivity

17 BTU-ft/ft²-hr°F

ID size

Will pass a 33/64-inch diameter x 2-inch long probe through the full length of the tube.

Coefficient of thermal expansion

5 x 10⁻⁶ in/in/°F

Straightness

3/16-inch per foot of length as measured chord to arc

Flexural strength

45,000 psi

Compressive strength

110,000 psi

Chemical Composition

Cr-77%, Al₂O₃-23%

Advanced Metals Processing Technology

Pyrotek

REGIONAL OFFICES

EUROPE:

United Kingdom +44 (0)1 908-561155
Germany +49 (0) 2182 8 10 20
France +33 (0) 4 37 43 13 00
Scandinavia +46 (0) 534 62000
Czech Republic +420 (0) 506 418 305
Switzerland +41 (0) 27 455 82 64
Spain +(34) 976 222 545

AFRICA:

Republic of South Africa
(27) (0)357 974 039

CANADA:

Pyrotek Canadian HQ
(418) 545-8093

ASIA:

Pyrotek Asia HQ
+(86) (0)755-26632324

JAPAN:

Pyrotek Japan Ltd.
+(81) (0)78 265-5590

AUSTRALIA:

Pyrotek Australia HQ
+61 (0)2 9631-1333

NEW ZEALAND:

Pyrotek New Zealand HQ
+64 (0)3 214-4789

Note: the physical and chemical properties listed represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice.

PRINTED IN THE USA BY PYROTEK, INC. • E. 9503 MONTGOMERY AVE. SPOKANE WA 99206

PHONE (509) 926-6212 • FAX (509) 927-2408 • PY4-05-97-390

www.pyrotek.info • e-mail: info@pyrotek.info